

MINBONI®

MINBONI®



Eugenes Columbus

SHENGZHOU REDBOWL REFRIGERATION EQUIPMENT CO.,LTD.


🏠 Add: NO.68 Zhenxi Rd, Huangze Town, Shengzhou Shaoxing City, Zhejiang Province, China
☎ Tel: 0086-575 83507830
📠 Fax: 0086-575 83507835
✉ E-mail: sale@redbowl.tw
👤 Elaine +86 13357555801
👤 Anita +86 18905851004

[Http://www.redbowl.tw](http://www.redbowl.tw)

MINBONI

OEM/ODM 专用目录

Refrigerator Series

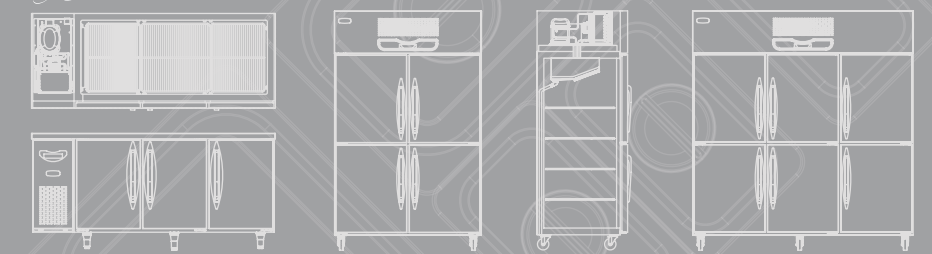

MINBON, established in 1987, has manufacturing bases both in Taiwan and Chinese mainland. Our company is specialized in producing commercial refrigerators, evaporators, condensers and electronic temperature controllers. The factory in Chinese mainland is located in Shengzhou, Zhejiang province (since 2005). We are capable to develop, design and produce refrigeration equipment.

Our products are 100 % for export and we accept OEM and ODM orders. Our major products include upright kitchen refrigerators, upright refrigerated showcases, under counter refrigerators, glass door under counter refrigerators, blast freezers, bar refrigerators and GN size refrigerators. The input power requirement is 220V/50 ~ 60Hz, however, we can also provide customers with 100~110V/50~60Hz refrigerators.

Our products can be used in hotels, restaurants, fast food chains, bakery shops, coffee shops, bars, self-service restaurants, central kitchens, and food processing factories. 12 patents have been obtained for the appearance and structure of our refrigerators. All of our products are capable to work excellently in high ambient temperature kitchen.

It is our commitment to customers.

- ◎ 台資企業 **MINBON** 成立於1987年，2005年在浙江省嵊州市建立生產基地，2013年針對歐美地區的規格註冊 **亞洛客 aroc** 商標。
- ◎ 我們專注於生產商用冰箱、蒸發器、冷凝器，擁有設計開發和生產製冷設備的能力。
- ◎ 我們的產品70%供外銷，主要包括立式廚房冰箱、立式玻璃展示櫃、工作台冰箱、工作台玻璃展示櫃、急速冷凍冰箱及份數盤冰箱。
- ◎ 我們提供220V和110V，50-60Hz產品，主要市場是賓館、酒店、速食連鎖店、烘焙坊、咖啡店、酒吧、中央廚房和食品加工廠等商業空間。目前已取得24項外觀和結構專利，所有產品適用於高溫高濕的廚房環境。這是我們對客戶的承諾。
- ◎ 感謝亞太地區客人的長期努力和支持，我們的產品已經進入世界知名酒店和品牌連鎖店，我們也將竭盡全力為客戶提供更好的服務。



Reliable performance and low power consumption are the goals we are pursuing

Our Effort
 Thanks to the efforts our agents, in the Asia-Pacific Region, have made over years, our commercial refrigerators are widely applied in many internationally well-known hotels, and fast food chains. We will spare no effort to continue to improve our product so that we can provide more convenience to our end-users.

Reliable performance and low power consumption are the goals we are pursuing



採用國際品牌壓縮機。

World Famous Brand Compressor
---Secop, Embraco, Tecumseh, Manuerop and Panasonic(OEM).

貫穿式機組，方便維護更換

Drop-in Refrigeration Unit
---More easy to replace, bigger system suitable for high ABM kitchen.

蒸發器冷凝器採用親水鋁箔和全內螺紋銅管，高效製冷。

Condenser & Evaporator
---use hydrophilic aluminum foil and inner grooved copper pipe .



隱藏式溫控，避免誤操作。推拉式機房面板，方便清理和維修。

Sliding Machine Room Panel
---Make maintenance easy. Hidden controller avoids person carelessly change temperature setting.



無把手設計，容易清理，更安全

No Handle Auto-back Door --- Easy to clean, safe to use.



可更換門封條

Removable Gasket
---Removable easy to replace.

採用環保冷媒，R134a和R404A

Environment Friendly Gas
---R404a for freezer
---R134a for Chiller



親水鋁箔耐腐蝕，經久耐用。

---Hydrophilic aluminum foil which is anti-corrosive, can prolong the service life of refrigerators.




內螺紋銅管提高製冷效率30%，節能環保。

---Inner grooved copper pipe which increases the cooling efficiency by about 30%, more energy saving.



電子溫控，冷藏2°C~12°C
冷凍-20°C~-12°C，可做冰溫-5°C。

Digital Thermostat
---Freezer is -20°C to -12°C
---Chiller is 2°C to 12°C



所有冷櫃裝了完整的門框電熱線，不滴水不冒汗。

Door frame Heater
---Both chiller and freezer have door frame heater, no water drip.



後背風路網，保障足夠的冷氣循環空間，保障製冷效果

Shelf & Airflow Shelf
---Backside airflow shelf keeps space for air circulation. Shelf load capacity 40Kg.



高等級絕緣，每片鐵板用PVC隔絕，不會導電。

High Insulation Grade
---Every steel plate is insulated by PVC, no conduction between them, more safe for user.



採用國際品牌壓縮機。

World Famous Brand Compressor
---Secop, Embraco, Tecumseh, Manuerop and Panasonic(OEM).

電子溫控，冷藏2°C~12°C
冷凍-20°C~-12°C，可做冰溫-5°C。

Digital Thermostat
---Freezer is -20°C to -12°C
---Chiller is 2°C to 12°C


蒸發器冷凝器採用親水鋁箔和全內螺紋銅管。親水鋁箔耐腐蝕，延長冰箱壽命。內螺紋銅管提高製冷效率30%，節能環保。

Hydrophilic Aluminum & Inner-Grooved Copper Pipe
---Evaporator and condenser adopt hydrophilic aluminum foil and inner grooved copper pipe, help increasing cooling by 30%.



一體貫穿式機組，方便維修更換

Joint-in Refrigeration Unit
---More easy to replace, bigger system suitable for high ABM kitchen.



蒸發器風機，風力大，揚程遠。

Evaporator Fan Motor
---Cross flow motor 2 meters effective distance of air throw. Can reduce cabinet temperature difference and keep food freshness.



無把手設計，容易清理，更安全

No Handle Auto-back Door --- Easy to clean, safe to use.



採用環保冷媒，R134a和R404A

Environment Friendly Gas
---R404a for freezer
---R134a for Chiller



隱藏式溫控，避免誤操作。抽取式過濾網，可抽出清洗，保持散熱順暢。

Filter Keeps Evaporator Clear
---Please take and clean it regularly. Hidden controller avoids person carelessly change temperature setting.



可移動層網，每片可負重40KG

Shelf
---Adjustable shelf load capacity 40Kg. Cold LED light is OK to use in +45°C AMB.



高等級絕緣，每片鐵板用PVC隔絕，不會導電。

High Insulation Grade --- Every steel plate is insulated by PVC, no conduction between them, more safe for user.



所有冷櫃裝了完整的門框電熱線，不滴水不冒汗。

Door frame Heater
---Both chiller and freezer have door frame heater, no water drip.



採用國際品牌壓縮機。
World Famous Brand Compressor
---Secop, Embraco, Tecumseh, Manurop and Panasonic(OEM).



敞開式機組，方便維護和散熱。
Open Refrigeration Unit
---good to heat dissipation.



蒸發器冷凝器採用清水鋁箔和全內螺紋銅管，高效製冷。
Condenser & Evaporator
---use hydrophilic aluminum foil and inner grooved copper pipe .



清水鋁箔耐腐蝕，經久耐用。
---Hydrophilic aluminum foil which is anti-corrosive, can prolong the service life of refrigerators.



內螺紋銅管提高製冷效率30%，節能環保。
---Inner grooved copper pipe which increases the cooling efficiency by about 30%, more energy saving.



電子溫控，冷藏2°C~12°C
冷凍-20°C~-12°C，可做冰溫-5°C。
Digital Thermostat
---Freezer is -20°C to -12°C
---Chiller is 2°C to 12°C



大面積燈箱，提升展示效果
Front Panel LED Lamp Box
---Large advertising light box, more publicity effect.



整根直把手，方便不同身高的人使用。
Straight Handle



採用環保冷媒，R134a和R404A
Environment Friendly Gas
---R404a for freezer
---R134a for Chiller




電加熱玻璃，不滴水不冒汗，水汽快速蒸發
Heater Glass Door
---Heater glass door no fog or water drip, good to display storage.



自動回歸門，帶定位裝置。
Auto close door---Auto close door with positioning function, good for food put in and take out.



冷光LED燈。
LED Lamp---Bright LED lamp, good choice for food display.



所有冷櫃裝了完整的門框電熱線，不滴水不冒汗。
Door frame Heater
---Both chiller and freezer have door frame heater, no water drip.




後背風路網，保障冷氣循環空間，保證製冷效果
Shelf & Airflow Shelf ---Backside airflow shelf keeps space for air circulation. Shelf load capacity 40Kg.




亞洲規格
Asian Specification




Chiller Model	HL-680C	HL-1200C	HL-1800C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×740×1935	1200×740×1935	1800×740×1935
壓縮機馬力 Compressor (Hp)	1/4	1/2	1/2
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19




Freezer Model	HS-680F	HS-1200F	HS-1800F
溫度範圍 Temp.range(°C)	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×740×1935	1200×740×1935	1800×740×1935
壓縮機馬力 Compressor (Hp)	1/2	3/4	1-1/2
製冷劑 Refrigerant	R404a	R404a	R404a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19



Chiller Model	HL-680C-1D	HL-1200C-2D	HL-1800C-3D
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×740×1935	1200×740×1935	1800×740×1935
壓縮機馬力 Compressor (Hp)	1/4	1/2	1/2
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19



Freezer Model	HS-680F-1D	HS-1200F-2D	HS-1800F-3D
溫度範圍 Temp.range(°C)	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×740×1935	1200×740×1935	1800×740×1935
壓縮機馬力 Compressor (Hp)	1/2	3/4	1-1/2
製冷劑 Refrigerant	R404a	R404a	R404a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19




適用場所和介紹 Suitable place & advantages


- 適合用於中央廠房、果汁吧、速食連鎖店、食堂廚房、酒店、食品加工廠等。內有活動層架，可以調整高度，方便放置食物。本系列的製冷機組針對高溫高濕的廚房設計，可以在35°C以上環境中正常工作。採用開放式大型製冷機組，是市面上同等產品製冷時間的一半。能在大量開門關門的情況下，快速製冷保證食物安全。熱帶規格，一體式機組，自動回歸門，外觀設計新穎，非常適合用於專業的工程配套。
- We adopt adjustable shelves inside which make food place e and high humidity, can work normally even at 35°C. In this series, freezers are using large open evaporator, refrigerating time is as half as that of other refrigerators in market. Can cool down quickly and keep foods in good condition immediately even when the doors are opened frequently. Ergonomic design and novel outlook, make them to be a good choice to professional kitchen equipment project. Standard tropical refrigerator, joint cooling unit, copper tube, door frame heater and auto-back door. Please contact us for information.



Chiller Model	EK-1200C	EK-1500C	EK-1800C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	260	360	460
產品尺寸 Dimension (mm)	1200×(600/700)×850	1500×(600/700)×850	1800×(600/700)×850
壓縮機馬力 Compressor (Hp)	1/3	1/3	1/3
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	2	2	3
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	84	66	57




Freezer Model	EK-1200F	EK-1500F	EK-1800F
溫度範圍 Temp.range(°C)	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	260	360	460
產品尺寸 Dimension (mm)	1200×(600/700)×850	1500×(600/700)×850	1800×(600/700)×850
壓縮機馬力 Compressor (Hp)	1/2	1/2	1/2
製冷劑 Refrigerant	R404a	R404a	R404a
層網數量 Shelf	2	2	3
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	84	66	57



★ 600mm,650mm,750mm depth are available, MOQ 9pcs/model.



Chiller Model	RF-1200C	RF-1500C	RF-1800C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	260	360	460
產品尺寸 Dimension (mm)	1200×(600/700+30)×850	1500×(600/700+30)×850	1800×(600/700+30)×850
壓縮機馬力 Compressor (Hp)	1/3	1/3	1/3
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	2	2	3
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	84	66	57




適用場所和介紹 Suitable place & advantages

- 適用於酒吧、吧台、自助餐廳、日式廚房等。食物一目了然，方便拿取和管理。用於酒吧時，可以改變冰箱內的燈管營造氣氛。內有活動層架，可以調整高度，方便放置食物。雙層電加熱玻璃門，不滴水不冒汗，提高展示效果。本系列的製冷機組針對高溫高濕的廚房設計，可以在35°C以上環境中正常工作。熱帶規格，一體式機組，自動回歸門，外觀設計新穎，非常適合用於專業的工程配套。
- Be widely used in bar, pub, Japanese restaurant and buffet restaurant. Refrigerating system is especially designed for kitchen of high temperature and high humidity, can work normally even at 35°C. Use double layers heated glass, not only prevent water and drip, but also provide good display performance which could increase sales. Ergonomic design and novel outlook, make them to be a good choice to professional kitchen equipment project. Standard tropical refrigerator, joint cooling unit, copper tube, door frame heater and auto-back door. Please contact us for information.







Chiller Model	RD-680C	RD-1200C	RD-1800C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×(740+30)×1935	1200×(740+30)×1935	1800×(740+30)×1935
壓縮機馬力 Compressor (Hp)	1/3	1/2	5/8
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19




Freezer Model	RD-680F	RD-1200F	RD-1800F
溫度範圍 Temp.range(°C)	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×(740+30)×1935	1200×(740+30)×1935	1800×(740+30)×1935
壓縮機馬力 Compressor (Hp)	1/2	3/4	1-1/4
製冷劑 Refrigerant	R404a	R404a	R404a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19



Chiller Model	RE-680C	RE-1200C	RE-1800C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×(740+30)× 1935	1200×(740+30)× 1935	1800×(740+30)×1935
壓縮機馬力 Compressor (Hp)	1/3	1/2	5/8
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19



Freezer Model	RE-680F	RE-1200F	RE-1800F
溫度範圍 Temp.range(°C)	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900	1400
產品尺寸 Dimension (mm)	680×(740+30)×1935	1200×(740+30)×1935	1800×(740+30)×1935
壓縮機馬力 Compressor (Hp)	1/2	3/4	1-1/4
製冷劑 Refrigerant	R404a	R404a	R404a
層網數量 Shelf	3	6	9
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19




適用場所和介紹 Suitable place & advantages


- 適用於超市、飲料經銷商、酒類經銷商、烘焙店、果汁吧、酒吧、咖啡店、冰淇淋店等。
內有活動層架，可以調整高度，方便放置食物。本系列的製冷機組針對高溫高濕的廚房設計，可以在35°C以上環境中正常工作。冷凍和冷藏雪櫃都採用電加熱玻璃門，冷藏兩層玻璃，冷凍三層玻璃。冷藏展示櫃可以儲存牛奶、芝士等奶製品。熱帶規格，一體式機組。
- Usually be used in supermarket, beverage dealer, wine dealer, bakeshop, juice shop, pub, coffee shop, ice cream shop.
Refrigerating system is especially designed for kitchen of high temperature and high humidity, can work normally even at 35°C. Both chiller and freezer use heated glass, chiller double layers, freezer triple layers. Not only prevent water and drip, but also provide good display performance which could increases sales.
Chiller refrigerators differ from other showcase in market, ours can store milk, cheese and so on. They are suitable for dairy food. Standard tropical refrigerator, joint cooling unit, copper tube, door frame heater. Please contact us for information.




Chiller Model	RG-640C	RG-1260C	RG-1880C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	500	1050	1600
產品尺寸 Dimension (mm)	680×(800+30)×2040	1260×(800+30)×2040	1880×(800+30)×2040
壓縮機馬力 Compressor (Hp)	1/3	1/3	1/2
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	4	8	12
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	50	23	14




Chiller Model	LD-640C	LD-1260C	LD-1880C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	500	1050	1400
產品尺寸 Dimension (mm)	640×(800+30)×2040	1260×(800+30)×2040	1880×(800+30)×2040
壓縮機馬力 Compressor (Hp)	1/3	1/3	1/2
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	4	8	12
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	50	23	14



Freezer Model	RG-640F	RG-1260F	RG-1880F
溫度範圍 Temp.range(°C)	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	500	1050	1600
產品尺寸 Dimension (mm)	640×(800+30)×2040	1260×(800+30)×2040	1880×(800+30)×2040
壓縮機馬力 Compressor (Hp)	1/2	1	1-1/2
製冷劑 Refrigerant	R404a	R404a	R404a
層網數量 Shelf	4	8	12
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	50	23	14



Freezer Model	LD-640F	LD-1260F	LD-1880F
溫度範圍 Temp.range(°C)	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	500	1050	1600
產品尺寸 Dimension (mm)	640×(800+30)×2040	1260×(800+30)×2040	1880×(800+30)×2040
壓縮機馬力 Compressor (Hp)	1/2	1	1-1/2
製冷劑 Refrigerant	R404a	R404a	R404a
層網數量 Shelf	4	8	12
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	50	23	14




適用場所和介紹 Suitable place & advantages

- 適用於超市、飲料經銷商、酒類經銷商、烘焙店、果汁吧、酒吧、咖啡店、冰淇淋店等。
內有活動層架，可以調整高度，方便放置食物。本系列的製冷機組針對高溫高濕的廚房設計，可以在35°C以上環境中正常工作。冷凍和冷藏雪櫃都採用電加熱玻璃門，冷藏兩層玻璃，冷凍三層玻璃。冷藏展示櫃可以儲存牛奶、芝士等奶製品。熱帶規格，自動回歸門。
- Usually be used in supermarket, beverage dealer, wine dealer, bakeshop, juice shop, pub, coffee shop, ice cream shop.
Refrigerating system is especially designed for kitchen of high temperature and high humidity, can work normally even at 35°C. Both chiller and freezer use heated glass, chiller double layers, freezer triple layers. Not only prevent water and drip, but also provide good display performance which could increases sales.
Chiller refrigerators differ from other showcase in market, ours can store milk, cheese and so on. They are suitable for dairy food. Standard tropical refrigerator, copper tube, door frame heater. Please contact us for information.




Chiller Model	UA-680C	UA-1345C	UA-680C-1D	UA-1345C-2D
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	600L	1250L	600L	1250L
產品尺寸 Dimension (mm)	680×(840+30)×2170	1345×(840+30)×2170	680×(840+30)×2170	1345×(840+30)×2170
壓縮機馬力 Compressor (Hp)	1/3	1/2	1/3	1/2
製冷劑 Refrigerant	R134a	R134a	R134a	R134a
層網數量 Shelf	3	6	3	6
燈 Illumination	LED	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	43	21	43	21



AA-680 can put 20pcs 1/1 GN pan, AA-1345 can put 40pcs 1/1 GN pan, pan height 65mm.

Freezer Model	UA-680F	UA-1345F	UA-680F-1D	UA-1345F-2D
溫度範圍 Temp.range(°C)	-18	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	600L	1250L	600L	1250L
產品尺寸 Dimension (mm)	680×(840+30)×2170	1345×(840+30)×2170	680×(840+30)×2170	1345×(840+30)×2170
壓縮機馬力 Compressor (Hp)	5/8	1	5/8	1
製冷劑 Refrigerant	R404a	R404a	R404a	R404a
層網數量 Shelf	3	6	3	6
燈 Illumination	LED	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	43	21	43	21




AA-680 can put 20pcs 1/1 GN pan, AA-1345 can put 40pcs 1/1 GN pan, pan height 65mm.

適用場所

- 適用於飯店、日式餐廳等，常常配套GN盤使用。內有活動層架，可以調整高度，方便放置食物。本系列的製冷系統，針對高溫高濕的廚房設計，能在35°C以上環境中正常工作。採用開放式大型製冷機組，是市面上同等產品製冷時間的一半。能在大量開門關門的情況下，快速製冷保證食物安全。熱帶規格，一體式機組，自動回歸門。
- Widely be used in restaurant, Japanese kitchen and hotel, always collocating with GN pans. Inner brackets is adjustable. Refrigerating system is especially designed for kitchen of high temperature and high humidity, can work normally even at 35°C. In this series, freezers are using large open evaporator, refrigerating time is as half as that of other refrigerators in market. Cool quickly and keep foods in the best condition immediately even when the doors are opened frequently. Standard tropical refrigerator, joint cooling unit, copper tube, door frame heater and auto-back door. Please contact us for information.



Freezer Model	UA-680BF	UA-1345BF	UA-680BF-1D	UA-1345BF-2D
溫度範圍 Temp.range(°C)	-35	-35	-35	-35
電壓 Voltage (V)	380V 3 phase	380V 3 phase	380V 3 phase	380V 3 phase
容積 Capacity (L)	350L	750L	350L	750L
產品尺寸 Dimension (mm)	680×(840+30)×2200	1345×(840+30)×2200	680×(840+30)×2200	1345×(840+30)×2200
壓縮機馬力 Compressor (Hp)	1-3 / 4	2-3/4	1-3/4	2-3/4
製冷劑 Refrigerant	R404a	R404a	R404a	R404a
層網數量 Shelf	3	6	3	6
燈 Illumination	LED	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	43	21	43	21



AA-680BF can put 10pcs 1/1 GN pan, AA-1345BF can put 20pcs 1/1 GN pan, pan height 65mm.

適用場所和介紹 Suitable place & advantages

- 適用於中央廚房、各類小型食品加工廠、高檔冰淇淋專賣店和星級酒店。一般用在處理高檔肉類、海鮮和Sauce，以快速降溫的手段，鎖住食物的水分和鮮度。在急速冷凍狀態下，抑制細菌滋生，保持食物的最佳狀態。
- Central kitchen, kinds of miniaturized food factories, ice cream shop and hotel. Usually be used to store expensive meat, seafood and sauce. Blast freezer could cool much fast to keep moisture and freshness furthest. Because bacteria breeding is inhibited in deep freezing, food would be stored in the best condition.




立式不鏽鋼烤盤雪櫃
Upright Stainless Steel Pasta Refrigerators


www.redbowl.tw
sale@redbowl.tw



Chiller Model	BA-680C	BA-1200C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900
產品尺寸 Dimension (mm)	680×740×1935	1200×740×1935
壓縮機馬力 Compressor (Hp)	1/4	1/2
製冷劑 Refrigerant	R134a	R134a
層網數量 Shelf	can put 10pcs	can put 20 pcs
燈 Illumination	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28



Freezer Model	BA-680F	BA-1200F
溫度範圍 Temp.range(°C)	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470	900
產品尺寸 Dimension (mm)	680×740×1935	1200×740×1935
壓縮機馬力 Compressor (Hp)	1/2	3/4
製冷劑 Refrigerant	R404a	R404a
層網數量 Shelf	can put 10pcs	can put 20 pcs
燈 Illumination	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28



適用場所和介紹 Suitable place & advantages

- 適合用烘焙店、蛋糕店、超市和飯店。
內有活動層架，可以調整高度，方便放置食物。
- Usually be used to store unleavened pasta and inhibit yeast.
Adjustable bracket, can put different height pans.
Standard tropical refrigerator, joint cooling unit, copper tube, door frame heater and auto-back door.




立式不鏽鋼抽屜雪櫃
Upright Stainless Steel Refrigerator with Drawer

www.redbowl.tw
sale@redbowl.tw



Chiller Model	HL-680C-D/W	HL-1200C-D/W	HL-1800C-D/W
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	470L	900L	1400L
產品尺寸 Dimension (mm)	680×740×1935	1200×740×1935	1800×740×1935
壓縮機馬力 Compressor (Hp)			
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	depends on door QTT	depends on door QTT	depends on door QTT
燈 Illumination	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	51	28	19




★Special products, please give door and drawer quantity, we will give model no. and quota.

適用場所和介紹 Suitable place & advantages

- 住商兩用型產品，降溫快速，保存食物量大，食材可以分類擺放，外形美觀大方。
- Can be used in both house and commercial kitchen, cools down fast.
Big capacity, could classify storage in different places.




Chiller Model	UD-500C	UD-695C	UD-1225C	UD-1530C	UD-1845C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/50-60Hz	220V/50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	90L	130L	260L	320L	400L
產品尺寸 Dimension (mm)	500×700×830	695×760×850	1225×760×850	1530×760×850	1845×760×850
壓縮機馬力 Compressor (Hp)	1/5	1/5	1/4	1/3	1/3
製冷劑 Refrigerant	R134a	R134a	R134a	R134a	R134a
層網數量 Shelf	1	1	2	2	3
燈 Illumination	LED	LED	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	198	132	69	63	42



They are depth without handle, with handle depth becomes 760mm+30mm.

Freezer Model	UD-500F	UD-695F	UD-1225F	UD-1530F	UD-1845F
溫度範圍 Temp.range(°C)	-18	-18	-18	-18	-18
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	90L	130L	260L	320L	400L
產品尺寸 Dimension (mm)	500×700×830	695×760×850	1225×760×850	1530×760×850	1845×760×850
壓縮機馬力 Compressor (Hp)	1/4	1/4	1/3	1/2	1/2
製冷劑 Refrigerant	R404a	R404a	R404a	R404a	R404a
層網數量 Shelf	1	1	2	2	3
燈 Illumination	LED	LED	LED	LED	LED
40尺櫃裝櫃數量 40GP loading	198	132	69	63	42




They are depth without handle, with handle depth becomes 760mm+30mm.

適用場所和介紹 Suitable place & advantages

- 適用於速食連鎖店、咖啡店和開放式廚房。
常防止於吧檯下面，帶輪子方便移動和清理地面。
此系列的冷藏雪櫃可以儲存奶製品。
製冷機組在雪櫃後面。
- Usually be placed under bar counter, easy to remove and clean ground with wheel.
Widely be used in fast food chain, coffee shop and open kitchen to store foods.
Chiller refrigerators are able to store milk and dairy foods.
Backside cooling system. Please contact us for information



Chiller Model	SSL-695C	SSL-1225C	SSL-1530C	SSL-1845C
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz	220V/50-60Hz
容積 Capacity (L)	130L	260L	320L	400L
產品尺寸 Dimension (mm)	695×(760+30)×1100	1225×(760+30)×1100	1530×(760+30)×1100	1845×(760+30)×1100
壓縮機馬力 Compressor (Hp)	1/5	1/4	1/3	1/3
製冷劑 Refrigerant	R134a	R134a	R134a	R134a
層網數量 Shelf	1	2	2	3
燈 Illumination	LED	LED	LED	LED
40尺規裝櫃數量 40GP loading	88	46	42	28
	can put 6 or 9 pcs 1/6 GN pan	can put 12 or 18 pcs 1/6 GN pan	can put 16 or 24 pcs 1/6 GN pan	can put 18 or 27 pcs 1/6 GN pan




適用場所和介紹 Suitable place & advantages

- 適用於速食連鎖店、果汁吧等，用來製作漢堡、三明治、甜品、冰品等。
放置蔬菜、水果和調料醬汁，一目了然。
自動回歸門，盡量避免冷氣外洩，確保食物安全。
製冷機組在雪櫃後面，此系列冰箱適用環境溫度32°C。
- Usually be used in fast food chain, restaurant and juice bar, to make sandwich, hamburger, salad, dessert and others.
It is convenient to store fruits, vegetables and sauce.
Automatic back door, try to avoid cold air comes out, to keep stored food in best condition.
Better to work under 32°C.





Chiller Model	EK-1200C-D/W	EK-1500C-D/W	EK-1800C-D/W
溫度範圍 Temp.range(°C)	+2~+12	+2~+12	+2~+12
電壓 Voltage (V)	220V/ 50-60Hz	220V/ 50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	260L	360L	460L
產品尺寸 Dimension (mm)	1200×700×850	1500×700×850	1800×700×850
壓縮機馬力 Compressor (Hp)			
製冷劑 Refrigerant	R134a	R134a	R134a
層網數量 Shelf	depends on door QTT	depends on door QTT	depends on door QTT
燈 Illumination	No	No	No
40尺規裝櫃數量 40GP loading	84	66	57




★ Special products, please give door and drawer quantity, we will give model no. and quota.

適用場所和介紹 Suitable place & advantages

- 廣泛使用與西式餐廳、日式廚房、星級酒店、和GN盤搭配適用，方便食材分類管理。自動回歸門，盡量避免冷氣外洩，確保食物安全。針對高溫的廚房環境，採用加大的蒸發器和冷凝器。可以定制門和抽屜的數量。
- Be widely used in restaurant, Japanese kitchen and hotel. Automatic back door, try to avoid cold air comes out, to keep storage in best condition. Can customize door and drawer quantity.



Chiller Model	WA-1430C-2D ss door	WA-1430C-2G glass door
溫度範圍 Temp.range(°C)	+2~+12	+2~+12
電壓 Voltage (V)	220V/50-60Hz	220V/ 50-60Hz
容積 Capacity (L)	290L	290L
產品尺寸 Dimension (mm)	1430×500×600	1430×500×600
壓縮機馬力 Compressor (Hp)	1/5	1/4
製冷劑 Refrigerant	R134a	R134a
層網數量 Shelf	2	2
燈 Illumination	No	No
40尺規裝櫃數量 40GP loading	128	128



適用場所和介紹 Suitable place & advantages

- 適用於都市小廚房，善加利用有限的空間，一般用於工程配套。
- Especially for narrow kitchen and open kitchen. The biggest advantage is space saving and store convenience.